




The frame surround enables the panel to be inserted directly into the clear structural opening, and screw-fixed into position through the side of the panel frame. Do not fix through the front of the frame.



The sliding pin hinge enables the door to be easily removed for fitting.

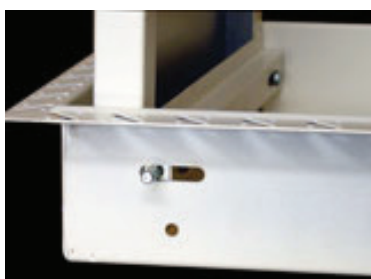


Ensure there is sufficient clearance for sliding pin hinge to operate correctly.



Continuous hinge doors can be removed from the frame by the bolts securing the hinge.



Simple to operate; remove the plastic plug, insert Tee key into budget lock and rotate 45 deg. Ensure there is sufficient clearance for the lock to operate correctly.

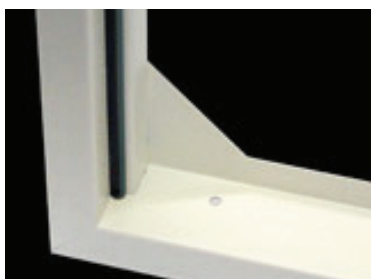

Fire rated doors have smoke seal strips fitted on the frame.



Surespan access doors with concealed beaded frame and plasterboard door types are designed for a wet finish, to be taped and skimmed on site.