


JAK.MD.BF.FR

METAL DOOR BEADED FRAME FIRE RATED

SIZES

JAK.MD.BF/FR60/120 is a fire rated panel designed to fit into any type of existing or new fire rated plasterboard ceiling/wall system allowing easy access into the cavity/void.

- ✓ Metal Door and concealed beaded frame
- ✓ Fire rated to BS EN 1634-1 1 hour integrity in a ceiling system and 2 hours for a wall system
- ✓ Manufactured from 1.2mm and 1mm Zintec Steel
- ✓ Tee Key Operated Three Way Lock

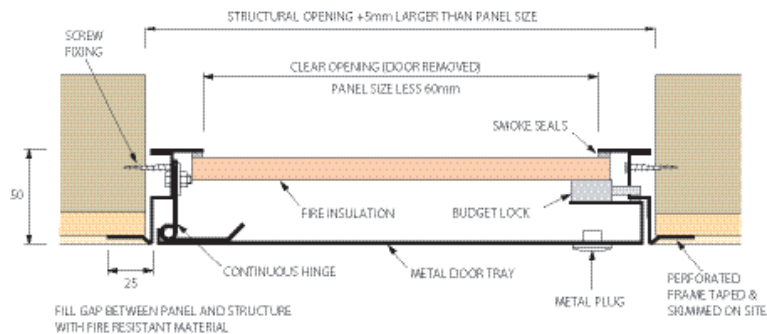

DIMENSIONS

Please note that on installation of the access panel, the actual size of the structural opening in the ceiling/wall needs to be 5mm larger than the overall panel size eg The structural opening for 600 x 600 would need to be 605 x 605. Non standard sizes available upon request.

SIZE*	STRUCTURAL OPENING	CLEAR OPENING (With door removed)	WEIGHT (Kg)
300 x 300	305 x 305	276 x 276	4
450 x 450	455 x 455	426 x 426	7
550 x 550	555 x 555	526 x 526	9
600 x 600	605 x 605	576 x 576	11
600 x 900	605 x 905	576 x 876	17
600 x 1200	605 x 1205	576 x 1176	24

*Bespoke sizes available on request

FIRE

The JAK.MD.BF/FR60/120 has been successfully tested to give up to 1 hour integrity in a ceiling system and 2 hours for a wall system. All in accordance with EN 1634, part 1:2000. Fire doors have intumescent strips fitted on the frames. DO NOT interfere with these strips.

LOCKING OPTIONS



Three Way Lock
(Standard)



Quarter Turn Lock



Key Lock



Tamper-Proof